



T4 PLUS

FOLDING ARM BARRIER

Daily 1000 Maneuvers

Stylish Design

Longlived

Cost-effective

Solid Mechanism

Car Park Application

Easy Installation

T4 PLUS

FOLDING ARM BARRIER

T4 Folding Arm Plus Barrier is a cost effective product used for specially mid-intensity traffic to control vehicles' entry and exit of low ceiling car parks.

Application

T4 Folding Arm Plus Barrier is a cost effective product , is used specially mid-intensity traffic to control vehicles' entry and exit for low ceiling closed car park applications.

Material


T4 Folding Arm Plus Barrier is produced as electrostatic painted by 3002 ral code. In the T4 Folding Arm Plus Barrier there are montage apparatus, 4 meters arm, remote control, anti-shock rubber, reflective sticker, bar fork and photocell as standard. As optional, there are also; flashing light, loop, button, heater and fan unit and ral code option min 5.pcs of barriers.

General Usage

T4 Folding Arm Plus Barrier is operating with all access control systems products like button, card reader, automation systems. T4 Folding Arm Plus Barrier is used by hand when the electricity is off , has 1000 pcs opening and closing maneuvers. Barrier arm opens after receive the dry contact from remote control, button unit, card reader etc. During this process, safety photocell on the barrier recognize the vehicle and stay open even if there is a delay for vehicle passing. After vehicle passes the barrier, barrier closes according to the automatic closing time. While vehicle passing from the barrier, if photocell does not work , vehicle will not be damaged thanks to anti-shock rubber under the arm. Arm will recognize the vehicle and will open again for vehicle passing.

Safety

Barrier has safety recall with encoder system for safety purposes. Photocell system is being used for safety if there is any delay for vehicle passing. Other method used is loop and if loop is used before barrier. When the vehicle comes over the loop, it opens the barrier by contacting the barrier.

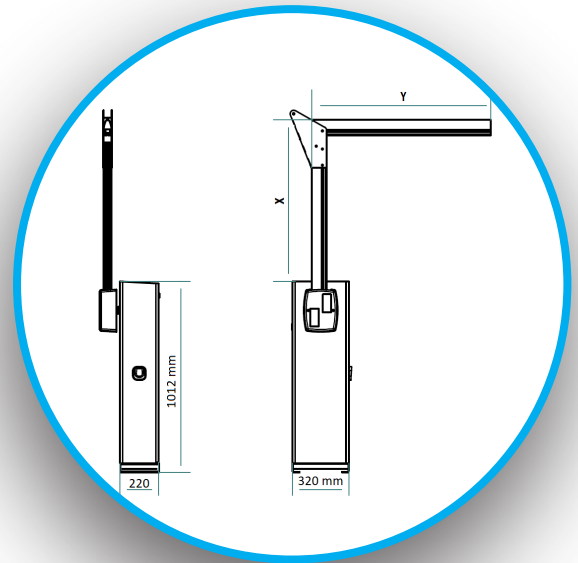

Control/Operation Voltage	220 V 50 Hz
Power Consumption	24 V DC
Opening Time	3 Seconds
Bar Length	4 Meters
Protection Level	IP64
Operation Temperature	- 20° C - + 60° C
Accessories	Mounting Plate,4mt Arm ,Anti Shock Rubber, Reflective Sticker, Photocell, Bar Fork, Remote Control
Dimensions	320x220x1012 mm
Weight	40 Kg
Optional Accessories	Flashing Light, Loop ,Ral Code (For Min 5 pcs) ,Button Unit, Heater & Fan Unit